



Standard

STANDARD RS2S200TPI

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	F96T12/VHO
Number Of Lamps	1/2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	RS2S200TP
Suitable For Outdoor Use	Yes
Automatic Restart	Yes

Operating and Electrical	
Input Voltage	120 V
Input Frequency	60 Hz
Total Harmonic Distortion USA	15 %
Power (Rated) (Nom)	215 W
Ignition Method	Rapid Start
Crestfactor (Nom)	1.7
Ignition Time (Nom)	1 s
Ballast Factor (Nom)	0.85
Power Factor (Nom)	0.9
Input Current (Nom)	3.31 A
Input Power (Nom)	358 W
Rated Lamp Power	215W W

Wiring	
Wire Striplength	0.50/0.375 mm
Lamp Connection	Series
Wire Length By Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	15'
Max Ballast-Lamp Distance Tandem Wiring	Any = 15'
Max Ballast-Lamp Distance Through Wiring	Any = 15'

Mechanical and Housing	
Housing Material	Metal
Housing	R11
Housing Dimensions	14.31" x 3.19" x 2.63"


Approval and Application	
EMC Immunity Standard	FCC Non-Consumer
Hum And Noise Level	A
UL Recognized	No

Standard

Product Data	
Order product name	STANDARD RS2S200TPI
EAN/UPC - Product	781087227626
Order code	913710311601
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	1
Material Nr. (12NC)	913710311601
Net Weight (Piece)	6.491 kg

Dimensional drawing

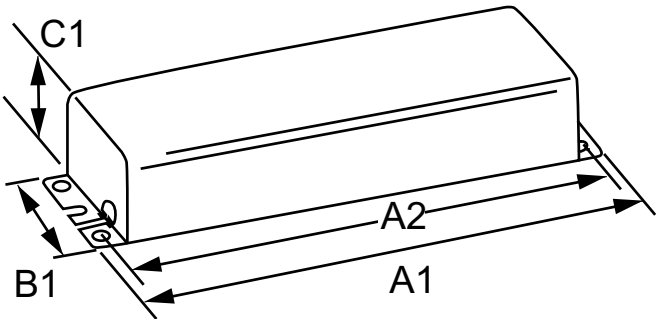

MAG BALLAST (2) F96T12/VHO 120V

Product	A1	A2	B1	C1
STANDARD RS2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in





Standard

STANDARD RS2S200TPI

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	F96T12/VHO
Number Of Lamps	1/2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	RS2S200TP
Suitable For Outdoor Use	Yes
Automatic Restart	Yes

Operating and Electrical	
Input Voltage	120 V
Input Frequency	60 Hz
Total Harmonic Distortion USA	15 %
Power (Rated) (Nom)	215 W
Ignition Method	Rapid Start
Crestfactor (Nom)	1.7
Ignition Time (Nom)	1 s
Ballast Factor (Nom)	0.85
Power Factor (Nom)	0.9
Input Current (Nom)	3.31 A
Input Power (Nom)	358 W
Rated Lamp Power	215W W

Wiring	
Wire Striplength	0.50/0.375 mm
Lamp Connection	Series
Wire Length By Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	15'
Max Ballast-Lamp Distance Tandem Wiring	Any = 15'
Max Ballast-Lamp Distance Through Wiring	Any = 15'

Mechanical and Housing	
Housing Material	Metal
Housing	R11
Housing Dimensions	14.31" x 3.19" x 2.63"


Approval and Application	
EMC Immunity Standard	FCC Non-Consumer
Hum And Noise Level	A
UL Recognized	No

Standard

Product Data	
Order product name	STANDARD RS2S200TPI
EAN/UPC - Product	781087227626
Order code	913710311601
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	1
Material Nr. (12NC)	913710311601
Net Weight (Piece)	6.491 kg

Dimensional drawing

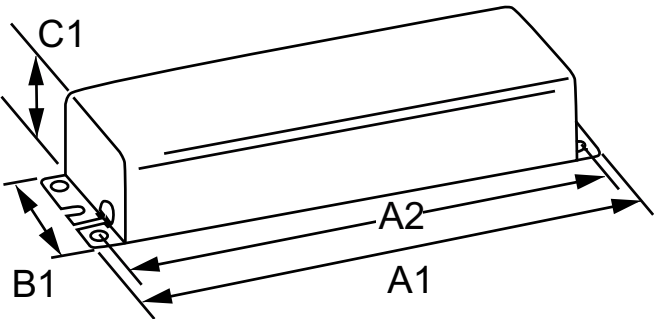

MAG BALLAST (2) F96T12/VHO 120V

Product	A1	A2	B1	C1
STANDARD RS2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in

